


DTK COMPUTER, INC.

PEM-2035

Processor	80386DX
Processor Speed	20MHz
Chip Set	VLSI
Max. Onboard DRAM	16MB (8MB on external memory card)
Cache	None
BIOS	DTK
Dimensions	333mm x 222.5mm
I/O Options	32-bit external memory card slot (PEI-306)
NPU Options	80387/3167

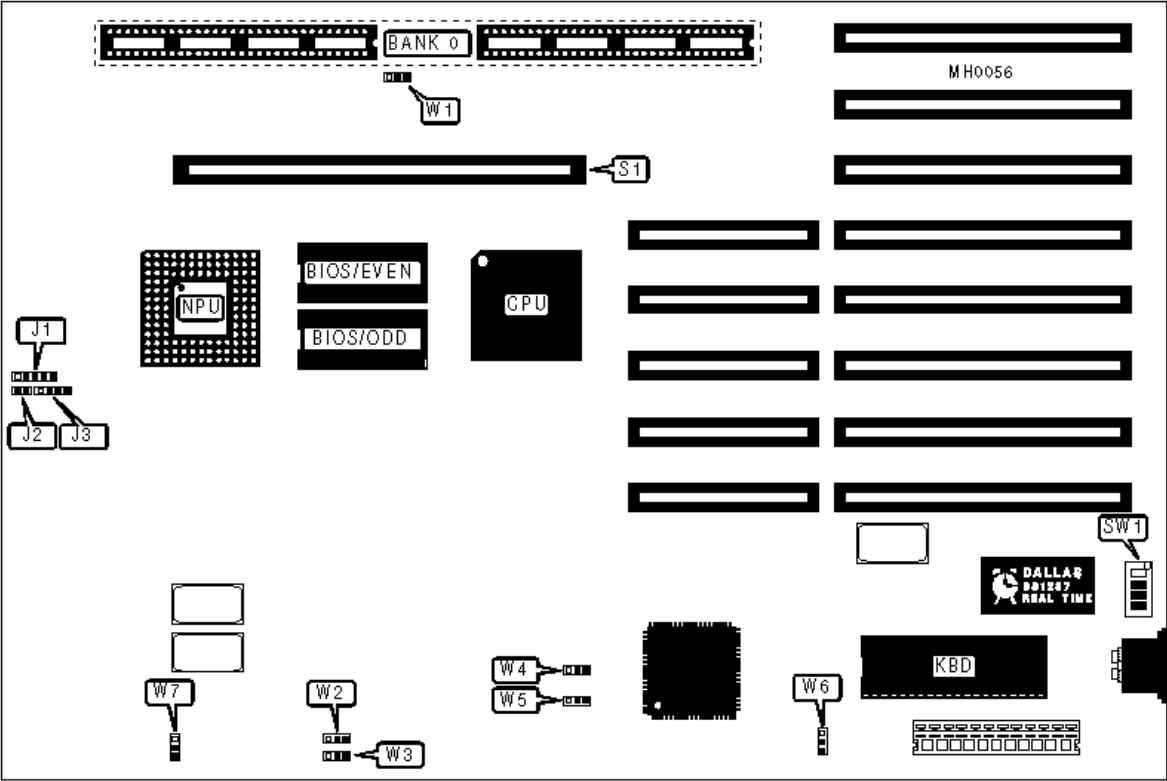

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	32-bit external memory card	S1
Reset switch	J2	Turbo switch	W4
Speaker	J3	Turbo LED	W5

USER CONFIGURABLE SETTINGS			
Function		Jumper	Position
»	DRAM (16-bit) speed select 2 wait state	W2	pins 2 & 3 closed
	DRAM (16-bit) speed select 1 wait state	W2	pins 1 & 2 closed
»	DRAM (8-bit) speed select 5 wait state	W3	pins 2 & 3 closed

	DRAM (8-bit) speed select 4 wait state	W3	pins 1 & 2 closed
»	CPU speed select 20MHz	W4	Open
	CPU speed select 8MHz	W4	pins 1 & 2 closed
	CPU speed select switchable from keyboard	W4	pins 2 & 3 closed
»	Monitor type select monochrome	W6	pins 1 & 2 closed
	Monitor type select color	W6	pins 2 & 3 closed
»	NPU disabled	W7	pins 2 & 3 closed
	NPU enabled	W7	pins 1 & 2 closed

DRAM CONFIGURATION	
Size	Bank 0
1MB	(4) 256K x 9
2MB	(4) 512K x 9
4MB	(4) 1M x 9
Note: The 512K x 9 SIPP module is a proprietary DTK design.	

DRAM JUMPER/SWITCH CONFIGURATION					
Size	SW1/1	SW1/2	SW1/3	SW1/4	W1
1MB	On	On	On	On	pins 2 & 3 closed
2MB	On	Off	On	On	pins 2 & 3 closed
4MB	Off	On	On	Off	pins 1 & 2 closed